



## AIR VENT Fig. VA705

### Features

- ✓ Screwed BSPP-ISO228
- ✓ Metal hard seal

### Technical Features


|                     |             |
|---------------------|-------------|
| Nominal Pressure    | 1.6MPa PN16 |
| Shell Test Pressure | 1.76MPa     |
| Air Test Pressure   | 0-0.6MPa    |
| Working Medium      | Water, Air  |
| Working Temperature | -20°C+110°C |

### Material Specification

| No. | Drawing No.     | Description          | Qty | Material    | Note |
|-----|-----------------|----------------------|-----|-------------|------|
| 1   | XXX-705-15-01   | BOBY                 | 1   | DZR(CZ132A) |      |
| 2   | 705-15-2        | FLOAT                | 1   | PP          |      |
| 3   | GB 34252.1-2005 | O-RING               | 1   | EPDM        |      |
| 4   | XXX-705-15-04   | BONNET               | 1   | DZR(CZ132A) |      |
| 5   | 705-15-05       | STEM                 | 1   | C38000      |      |
| 6   | 705-15-06       | SEALING              | 1   | EPDM        |      |
| 7   | 705-15-07       | SPRING               | 1   | S/S 304     |      |
| 8   | GB 34252.1-2005 | O-RING               | 1   | EPDM        |      |
| 9   | 705-15-09       | CORE                 | 1   | C38000      |      |
| 10  | 705-15-10       | WASHER RING          | 1   | EPDM        |      |
| 11  | 705-15-11       | CAP                  | 1   | C38000      |      |
| 12  | GB 34252.1-2005 | O-RING               | 1   | EPDM        |      |
| 13  | 705-15-25-13    | ADAPER               | 1   | DZR(CZ132A) |      |
| 14  | 705-15-25-14    | SPRING               | 1   | S/S 304     |      |
| 15  | 705-15-25-15    | SELF-CLOSING FITTING | 1   | DZR(CZ132A) |      |
| 16  | GB 34252.1-2005 | O-RING               | 1   | EPDM        |      |

### Main Dimensions (mm)

| SIZE | 1/2 | 3/4  | 1  |
|------|-----|------|----|
| H    | 65  | 66.5 | 69 |
| L    | 32  | 32   | 32 |

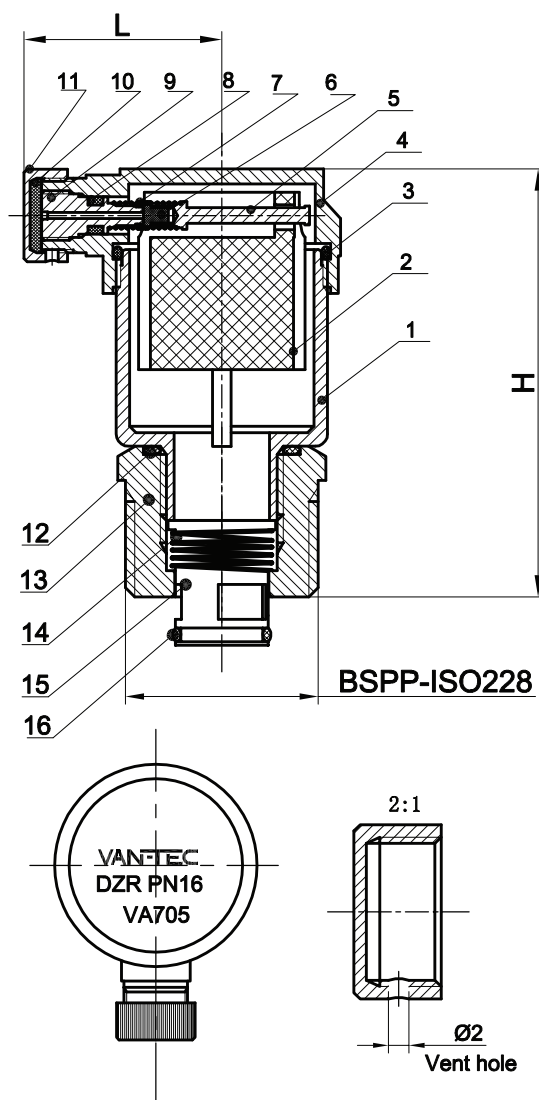

### Notes

Designs, materials and specifications shown are subject to change without notice due to the continuous development of our products.