



Remote Float Control Valve


Fig. VA100X

Specification

- ✓ Design Standard: CJ/T 219, JB/T 10674
- ✓ Connection Standard: BS EN 1997-2-1092
- ✓ Working Pressure: PN16/10
- ✓ Temperature Range: 0°C- 80°C
- ✓ Coating: Fusion Bonded Epoxy Coating in accordance with ANSI/AWWA C550

MATERIAL SPECIFICATION

Part No.	Part	Standard Specification
1	Valve Body	EN-GJS10-450-
2	Seat	SS304
3	Gasket Pressing Plate	EN-GJS10-450-
4	O-Ring	NBR
5	Gasket	EPDM
6	Disc	EN-GJS10-450-
7	Diaphragm	Nylon+ EPDM
8	Diaphragm Pressing Plate	EN-GJS10-450-
9	Flat Gasket	Galvanized Carbon Steel
10	Screw	Galvanized Carbon Steel
11	Spring	SS304
12	Sealing Plug	SS304
13	Stem	SS304
14	Bonnet	EN-GJS10-450-
15	Bonnet Plug	SS304

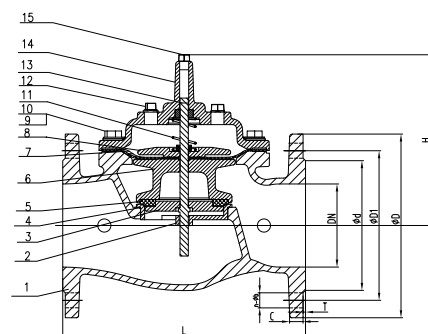

Note: For special material request other than standard specification, please indicate clearly on the inquiry or order list.

DN		PN	Dimensions(mm)							
Inch	mm		H	L	D	D1	d	C	T	n-Øb
2"	50	10/16	132	203	165	125	99	19	3	-4Ø19
2.5"	65	10/16	158	216	185	145	118	19	3	-4Ø19
3"	80	10/16	167	241	200	160	132	19	3	-8Ø19
4"	100	10/16	190	292	220	180	156	19	3	-8Ø19
6"	150	10/16	293	356	285	240	211	19	3	-8Ø23
8"	200	10	380	495	340	295	266	20	3	-8Ø23
		16	380	495	340	295	266	20	3	-12Ø23

Notes

Designs, materials and specifications shown are subject to change without notice due to the continuous development of our products.