

**DZR Hose BIB Cock
With Hose Union PN16
Fig. VA502D**



Technical features

Nominal pressure	1.6MPa PN16
Shell Test Pressure	1.76MPa
Air Test Pressure	0.6MPa
Working Medium	Water
Working Temperature	0°C+110°C

Dimensions in mm

Size	DN15	DN20	DN25
Threads	1/2"	3/4"	1"
D	85	85	106.5
D1	52	52	59
H	37	37	55
H1	46.5	46.5	54.5
E	12	12	14
d	10	10	13.5
weight(g)	180	180	375

No.	Description	Material	Note
1	BODY	DZR(CZ132A)	NICKLE PLATING
2	BALL	HPb57-3	CHROME PLATING
3	SEAT	PTFE	
4	BONNET	DZR(CZ132A)	NICKLE PLATING
5	STEM	HPb57-3	NICKLE PLATING
6	O-ring	NBR	
7	HANDLE	Q235A	CHROME PLATING
8	SCREW	SUS304	
9	WASHER RING	NBR	
10	UNION NUT	HPb57-3	NICKLE PLATING
11	HOSE PIPE	SUS201/SUS304	
12	MAINFOLD85	PP (white)	

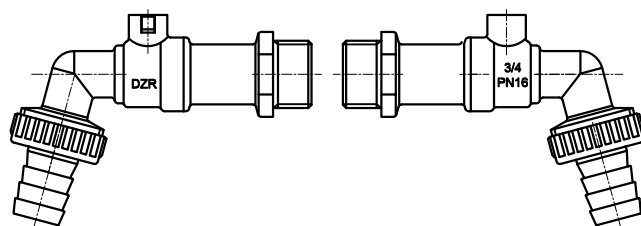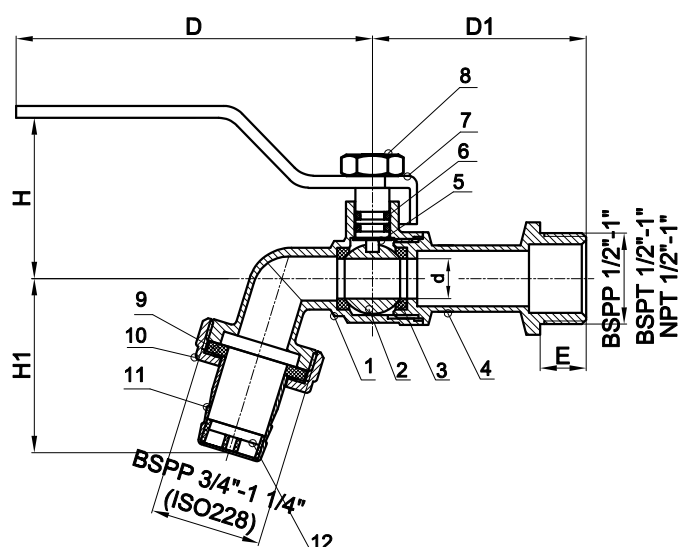

BSPP-ISO228/BSPT-ISO7/1&NPT-ANSI B120.1

Notes

Designs, materials and specifications shown are subject to change without notice due to the continuous development of our products.